

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Models 002276, 003076 and 003076A

- Retains UL listing after reconnection.
- Internal pressure balancing chamber prevents “line shock” nuisance separations.
- Separates at less than 200 lbf / 899.6 N which minimises “backlash” force of separation reducing damage to equipment.

Model 005231

- Retains UL listing after reconnection.
- Uses the same internal balancing chamber as Model 002276.
- Separates at less than 115 lbf / 511.5 N.

Model 005812 and 006914

- Light weight, inexpensive and disposable.
- Same instant-closing dual poppet check valve design as Model 002276.
- Separates at less than 300 lbf / 1334.4 N.

Model 006301

- Internal Pressure Compensation Chamber (PCC) that prevents “line shock” nuisance separations.
- Same instant-closing dual poppet check valve design as Model 002276.
- Separates at less than 225 lbf / 1000.8 N.



002276



005812

Reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT (KG)
002276**	1" F x 1" F Reconnectable Safe-T-Break®	.75 (.34)
005231**	1" F x 1" F Reconnectable Low-Pull Safe-T-Break®	.75 (.34)

Non-reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT (KG)
005812**	1" F x 1" F Non-Reconnectable Safe-T-Break®	.61 (.27)
006131**	1" F x 1" F PCC Non-Reconnectable Safe-T-Break®	.69 (.31)

Reconnectable with BSPP


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT (KG)
003376**	1" F x 1" F Reconnectable Safe-T-Break®	.75 (.34)
003076A*	1" F x 1" F Reconnectable Safe-T-Break® - ATEX	.75 (.34)

Non-reconnectable with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT (KG)
006914**	1" F x 1" F Non-Reconnectable Safe-T-Break®	.61 (.27)

CONSTRUCTION


RECONNECTABLE SAFE-T-BREAKS®	
BODY	Aluminum
SEALS	Fluorocarbon
SPRINGS	Stainless Steel Stainless steel load and latch spring reverse mechanism Hardened stainless steel latch ring and balls
NON-RECONNECTABLE SAFE-T-BREAKS®	
BODY	Zinc Alloys and Aluminum
SEALS	Fluorocarbon

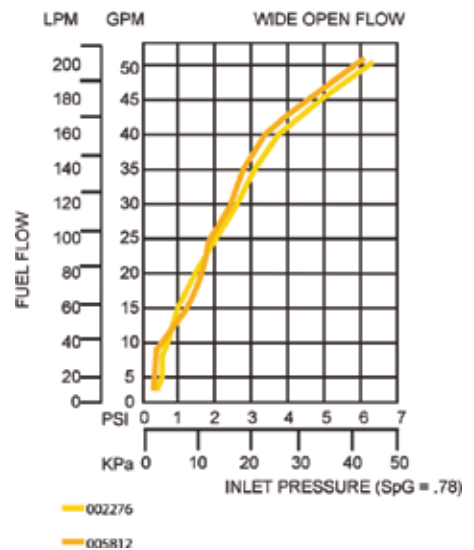

Dimensions and System Options

Whip Hoses

MODEL NO.	DESCRIPTION
002277	1" M x 1" M (25mm M x 25mm M) Whip Hose
227677**	1" M x 1" M Whip Hose connected to model 002276 1" F x 1" F Reconnectable Safe-T-Break®
581277**	1" M x 1" M Whip Hose connected to model 005812 1" F x 1" F Non-reconnectable Safe-T-Break®
002278	1" M x 1" M (25mm M x 25mm M) Whip Hose with Swivel Nut

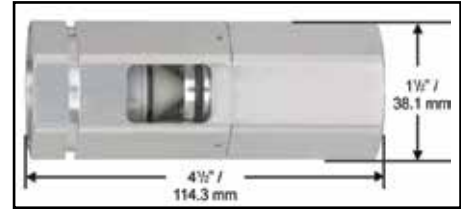

Guards

MODEL NO.	DESCRIPTION
003098**	Safe-T-Break® Scuff Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup
003813	Safe-T-Break® Demonstration Kit

Colour Chart

COLOUR	SUFFIX	COLOUR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20