

# Swivel/STB Inline Combo



# Husky

GENERAL FUELING PRODUCTS

11-3

SWIVEL/SAFE-T-BREAKS®

## Inline COMBO.



### Features




- Single Plane 360° Rotation
- Unique to Husky® products, the steel ball bearing design provides easier joint movement during high pressure applications.
- Safe-T-Break® is service reconnectable
- Check valve to stop flow of fuel on hose side
- Check valve O-ring to ensure reliable fuel shut-off
- Separates between 180 lbs. and 337 lbs.
- Separates at angles up to 90°
- Compact and easy to handle
- Fuel/Diesel or DEF versions available

### Construction

Body: Anodized aluminum  
 Seals: Fluorocarbon  
 Nuts: Stainless steel, electroless nickel-plated steel

### Inline Combo

MODEL NO.	Scuff Guard	Fuel/DEF	Swivel	Swivel Thread	STB Thread	ATEX	Shipping Weight
012828	X	DEF	360°	3/4" BSP M	3/4" BSP M	—	.90lbs/.40KG
012831	X	DEF	360°	3/4" NPT M	3/4" NPT M	—	.90lbs/.40KG
012887	X	DEF	360°	3/4" BSP M	1" BSP F	—	.90lbs/.40KG
012890	X	DEF	360°	3/4" BSP M	1" BSP M	—	.80lbs/.36KG
013185	X	DEF	360°	M34 M	1" BSP M	—	.80lbs/.36KG
014438	X	DEF	360°	1" BSP M	1" BSP M	—	.90lbs/.40KG
013530A*	X	FUEL	360°	1" BSP M	1" BSP M	X	.90lbs/.40KG
013530	X	FUEL	360°	1" BSP M	1" BSP M	—	.90lbs/.40KG
013827A*	X	FUEL	360°	3/4" BSP M	3/4" BSP M	X	.80lbs/.36KG

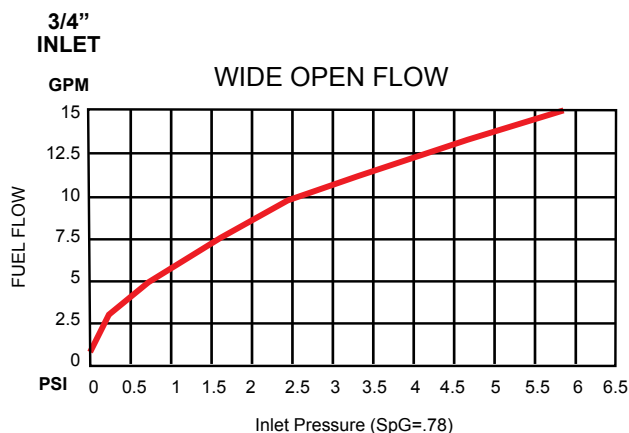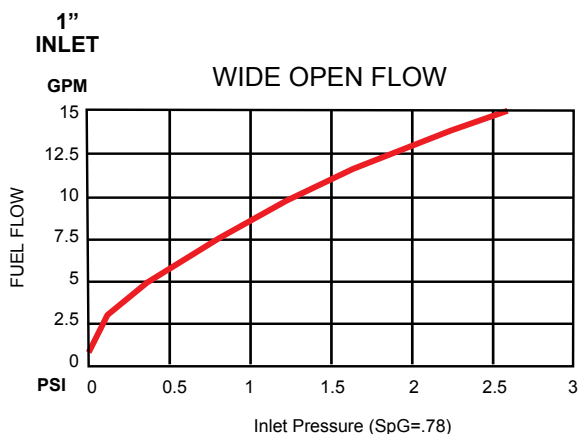

**!** WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov



# Swivel/STB Inline Combo

## Inline COMBO

## Dimensions and System Options

### Guards

MODEL NO.	DESCRIPTION
0008526	Scuff Guard for Safe-T-Break®



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A. 